



PALMiYE


OUTDOOR LIGHTING

PROFESSIONAL LED ARMATURE

PALMLED ARSİ



PALMLED ARSİ

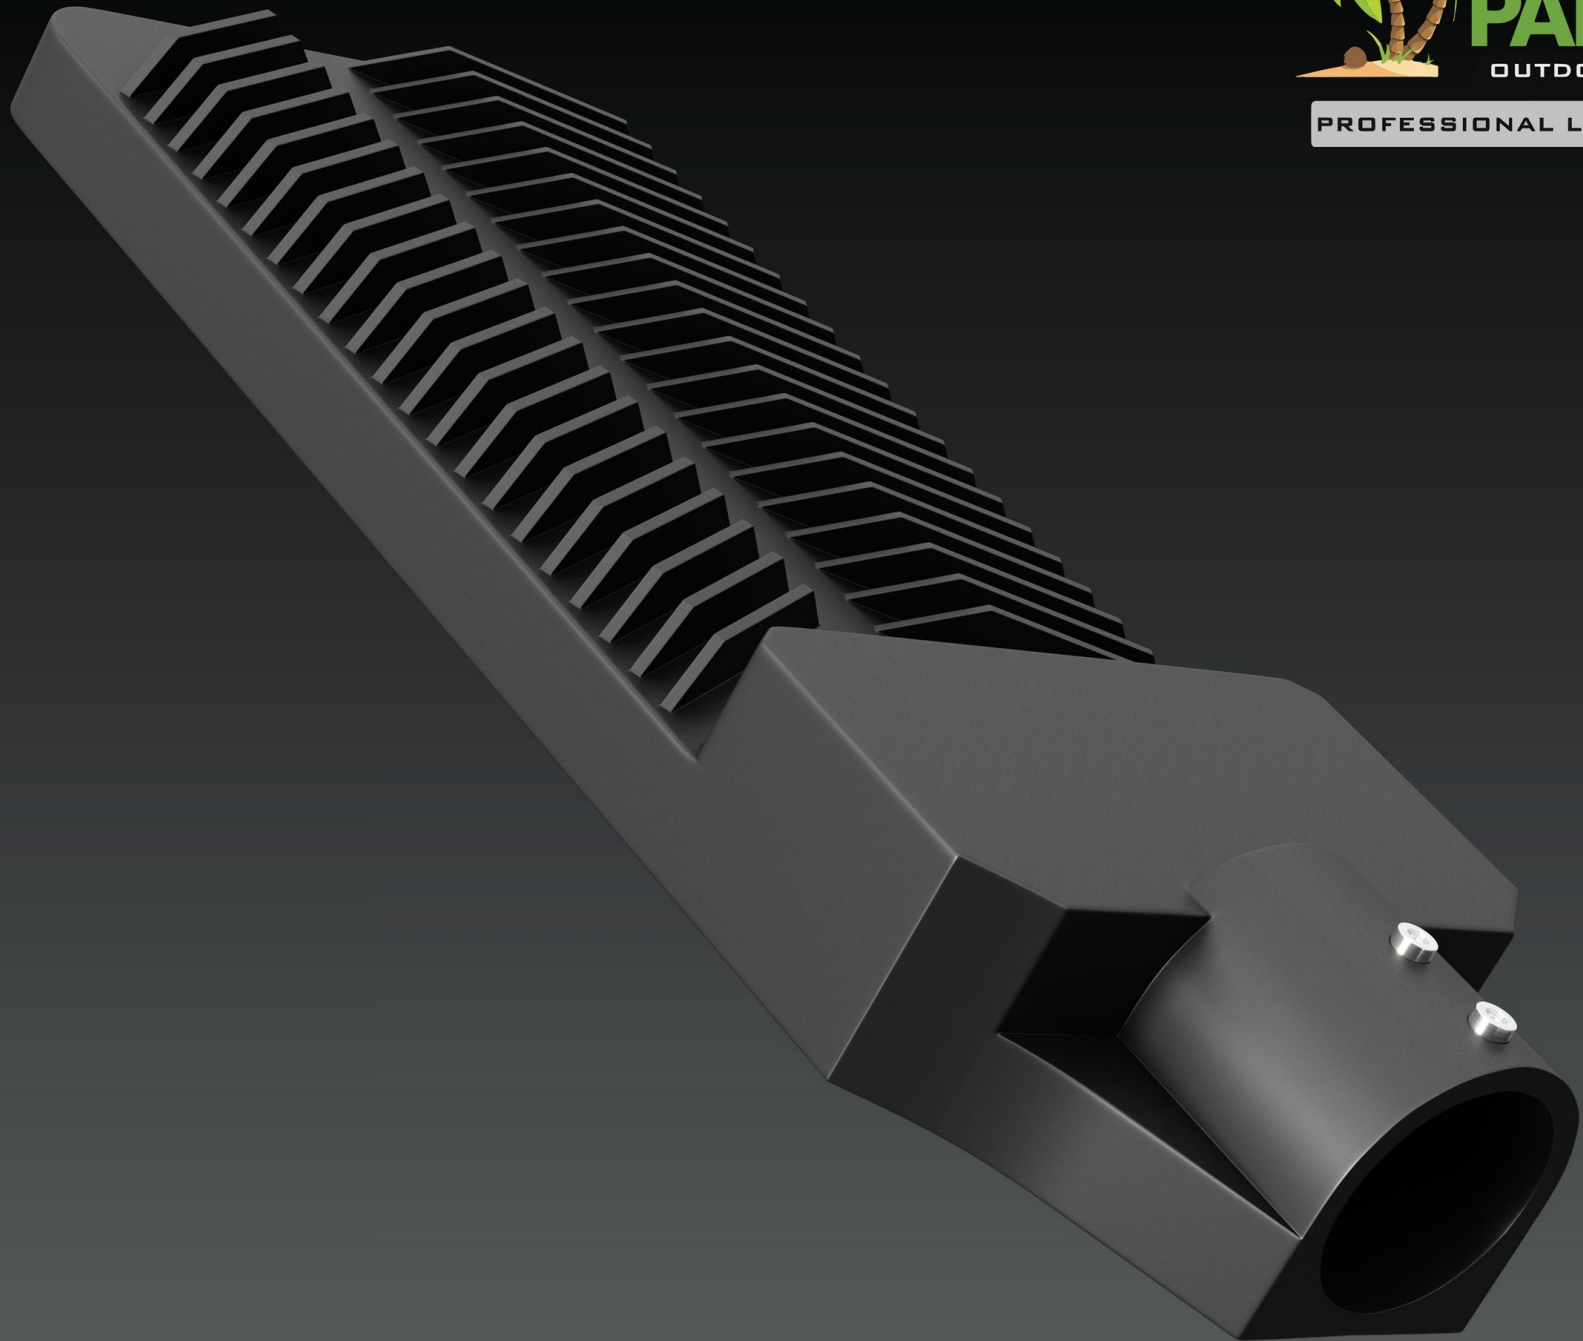



MOSO

CREE
LEDs

MW
MEAN WELL

NICHIA

OSRAM
LED TECHNOLOGY INCLUDED

SAMSUNG

PHILIPS

Gövde Body	Alüminyum Enjeksiyon Aluminium Injection	Giriş Gerilimi Input Voltage [V]	220-240 VAC
LED	Nichia, Lumileds, Samsung, Osram	Renksel Geri Verim İndeksi CRI	>70
Lens	Polimer Enjeksiyon PMMA Polymer Injection PMMA	Güç Faktörü Power Factor	> 0.95
Optik Kapak Diffuser	IK08 - Temperli Cam Clear Tempered Glass	Frekans Frequency [Hz]	47-60
Sürücü Driver	Philips, Meanwell, Moso, Osram 5 Years Warranty	IP Koruması IP Protection	IP66

Genel Özellikler ;

- Toz ve neme karşı IP66 koruma
- Hızlı, kolay ve aletsiz montaj
- Yol aydınlatma standardı EN13201 uyumluluk
- EN 62471:2008 Standartında UV Radyasyon Riski yoktur.
- Fotobiyolojik risk yoktur.
- Yukarı ışık dağılımı yoktur.
- Isı ve yüksek voltaj korumalı LED Sürücü
- Değiştirilebilir LED Modülü
- Değiştirilebilir LED Sürücü
- Yüksek dayanıklı alüminyum enjeksiyon gövde
- Civa ve benzeri metaller içermez.
- Bağlantı parçaları paslanmaz çeliktir.

Features ;

- IP66 protect against dust and moisture
- Quick, easy and toolless installation
- Complies with road lighting standard EN13201
- "Exempt Group" (No risk linked to infrared, blue light and UV radiation) in accordance with EN 62471:2008
- No photo-biological risks
- No upwards dispersion of the luminous flux.
- Thermal and high voltage protected drivers
- Replaceable LED Module
- Replaceable LED driver
- High strength aluminium injection body
- No contain mercury or similar metals
- All fittings used are in stainless steel




Armatür Güçleri / Product Code

Ürün Kodu Product Code	Güç [W] Power	Işık Akısı [lm] Luminous Flux	Renk Sıcaklığı [K] Colour Temp.
PALMLED ARSİ - 40	40W	5400 LM	3000/4000/6500K
PALMLED ARSİ - 60	60W	8100 LM	3000/4000/6500K
PALMLED ARSİ - 80	80W	10800 LM	3000/4000/6500K
PALMLED ARSİ - 100	100W	13500 LM	3000/4000/6500K
PALMLED ARSİ - 120	120W	16200 LM	3000/4000/6500K

ARMATÜR TEKNİK ÖLÇÜLER

ARMATURE TECHNICAL DIMENSIONS

580 mm

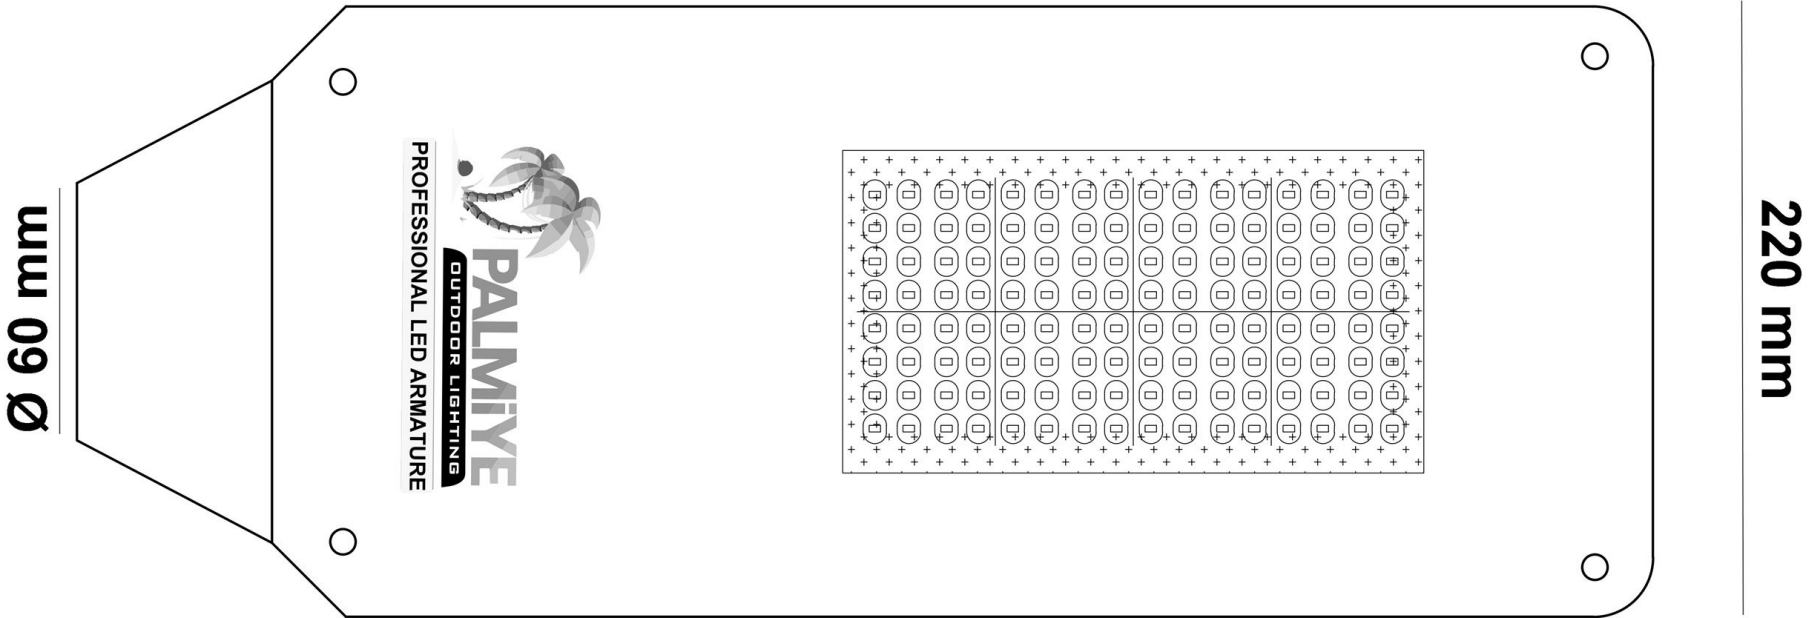


220 mm


Ø 9 mm

Light Distribution Curve

Işık Şiddeti Dağılım Eğrisi

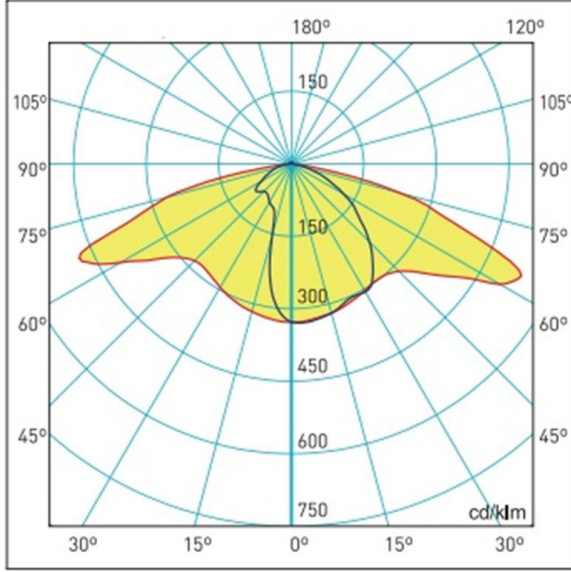

180.0 — 0.0 270.0 — 90.0 65W LED η :100.00%

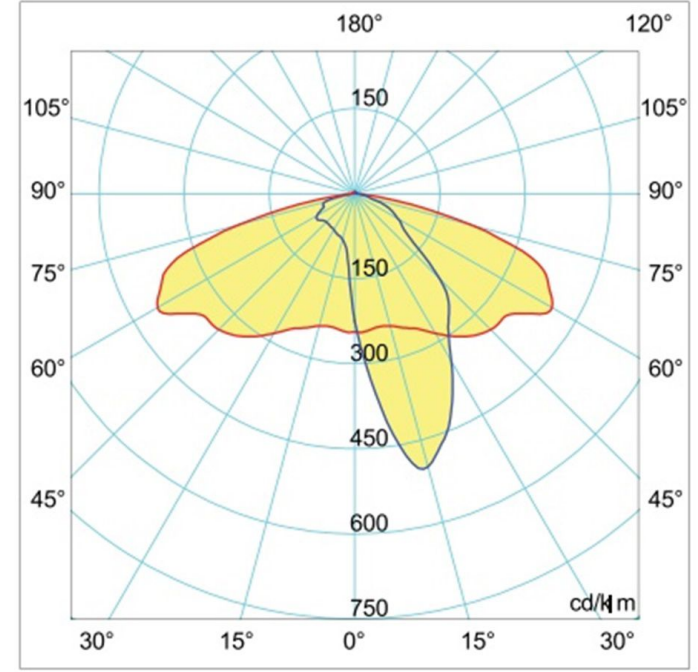


180.0 — 0.0 103W LED η :100.00 %
270.0 — 90.0

Optik Seçenekleri
Yüksek geçirgenlikte optik lens en verimli kullanım için tasarlanmıştır. Sararma yapmaz özelliğindedir.

Optic options

The high transmittance optical lens is designed for the most efficient use. Does not make yellowing.

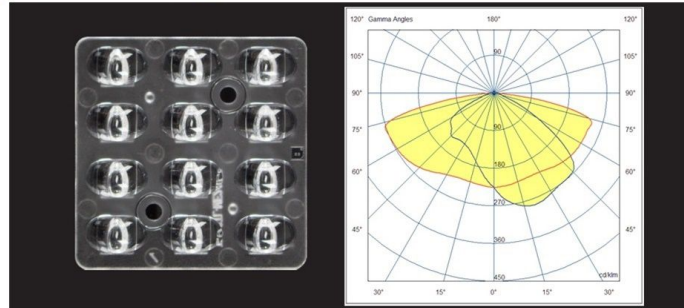


UYGULAMA GÖRSELLERİ APPLICATION IMAGES



Paketleme

Packing Layout

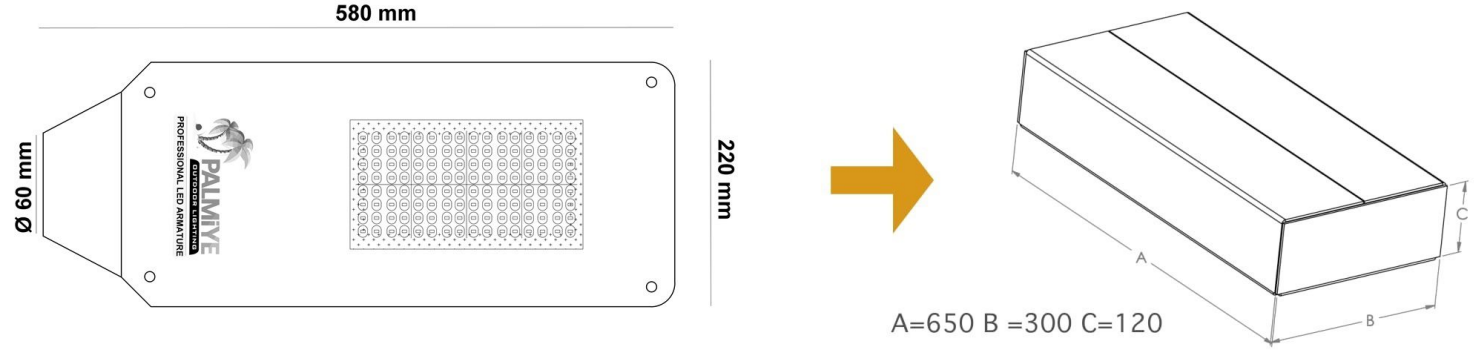

Kutu Ölçüleri



Package Size

650 mm x 300 mm x 120 mm. 1 Adet Ürün / Pcs Product

Palet Ölçüleri

Palet Size

1200 mm x 1000 mm x 1600 mm. 4 x 13 Adet Ürün / Pcs Product

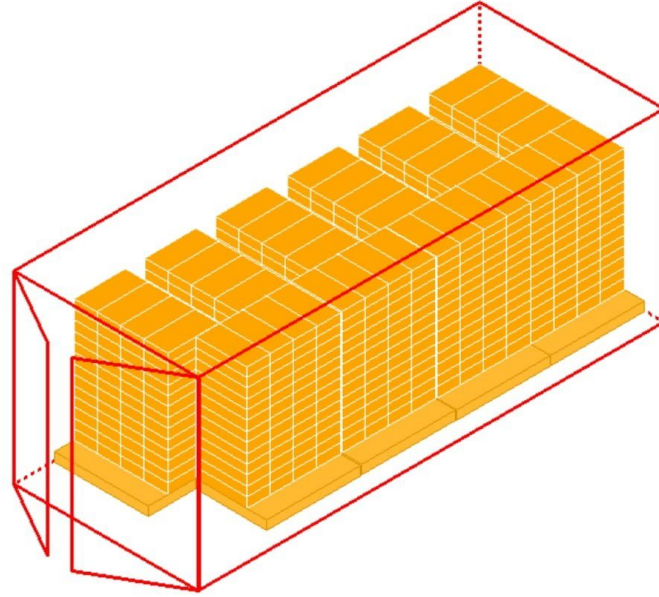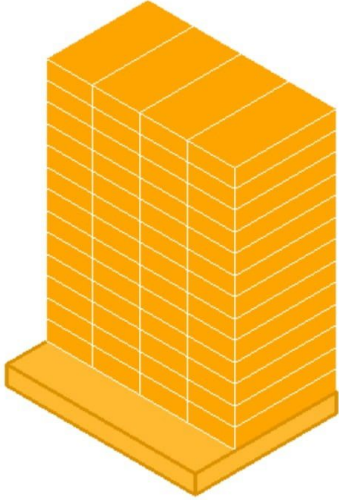

20' Konteyner Yükleme 520 Adet / Ürün Hacim 12.17m³

20' Konteyner 520 Pcs Products / Volume 12.17 m³